



**MITSUBISHI
ELECTRIC**

Digital Photo Technology

CP9600DW

Changes for the Better



High Quality Digital Photos in an Instant

High resolution dye sublimation printer

The CP9600DW uses dye sublimation technology to produce 600 DPI resolution photos in 4"x6", 4.5"x6", 5"x7", 6"x8" and 6"x9" formats, that are durable, water & UV resistant, cost effective and emerge completely touch dry.

High capacity consumables (600 prints on 4"x6" paper/ink media) also ensures cost effectiveness and requires very little time to be spent to change over the easy to install roll-fed media.

- **Dye Sublimation Technology**
- **600 DPI resolution**
- **High speed with USB 2.0**
- **4" x 6" up to 6" x 9" print sizes**
- **Windows & Mac compatible**

CP9600DW

MITSUBISHI ADAPTIVE MANAGEMENT (MAM) ENGINE

With an optimised thermal head, the Mitsubishi CP9600DW ensures high definition photos and the finest detail in image reproduction.

HIGH-CAPACITY CONSUMABLES: REDUCED COSTS


The CP9600DW uses the same roll-fed paper and ink media as the highly successful CP9550DW. With 600 prints per media set on the 4"x6" size, the CP9600DW requires little time to be spent changing consumables and provides cost effective prints.

LONG-LIFE HEAD: GUARANTEED QUALITY

A new protective covering on the thermal head increases the life of the head considerably.



INDICATORS

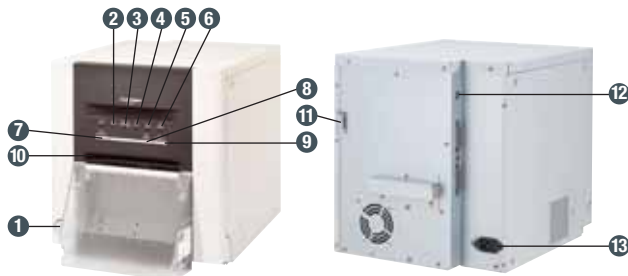

- | | | | |
|-------------------------------|---------------------|---------------------------|-----------------------|
| 1 On/off button | 5 Ready | 9 Paper feed & cut button | 13 Power supply input |
| 2 Alarm indicator | 6 Cooling indicator | 10 Copy output | |
| 3 Paper/ink indicator | 7 Open button | 11 DIP terminals | |
| 4 Data transmission indicator | 8 Cancel button | 12 USB Port | |

DIMENSIONS



SPECIFICATIONS

MODEL		CP9600DW
Configuration		Mitsubishi developing systems
Printing method		Thermal sublimation
Resolution	High resolution mode Normal mode	600 DPI 300 DPI
Levels		256 colour levels
Printing time	High resolution mode	4x6" (10x15cm) 57 sec.
		5x7" (13x18cm) 100 sec.
		6x9" (15x23cm) 105 sec.
	Normal mode	4x6" (10x15cm) 24 sec.
		5x7" (13x18cm) 39 sec.
		6x9" (15x23cm) 42 sec.
Buffer memory		32 Mb
Interface		USB 2.0
Dimensions (width x height x depth)		300 x 325 x 365 mm
Weight		17Kg
Power supply		AC 220-240V 50-60Hz
Consumption	Printing	1.6A
	Not printing	0.3A

CONSUMABLES

MODEL	COPIES/ROLL	SIZE
CK9046	600	4x6"
CK9057	350	5x7"
CK9069	270	6x9"

 **MITSUBISHI ELECTRIC EUROPE**

New publication, effective November 2007 Specifications subject to change without notice.